


# N13.800 CR3

## SPECIFICATIONS

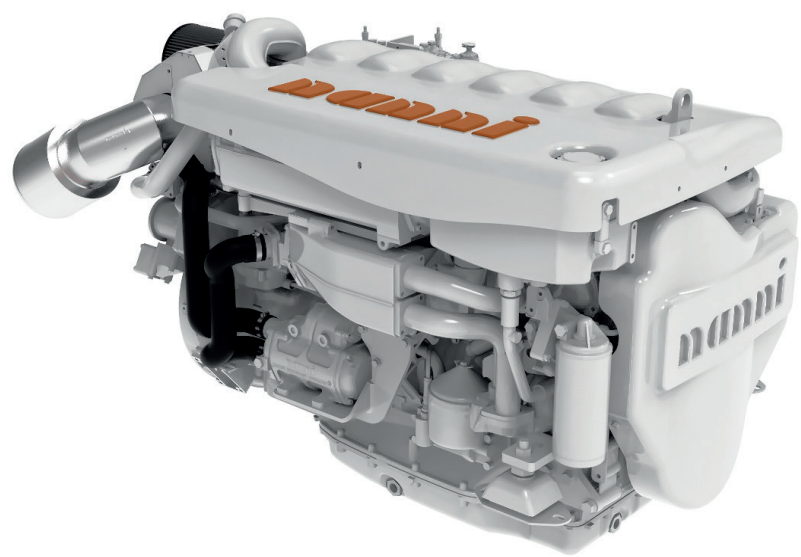

Power at crankshaft	588 kW [800 hp]
Displacement	12.7 l [775 in³]
Configuration	6 cylinders in line
Operation type	4 stroke Diesel
Bore & Stroke	130 x 160 mm [5.1 x 6.3 in]
Compression ratio	17.3 : 1
Rated speed	2300 rpm
Idling speed	600 rpm
Peak torque	3120 Nm
Peak torque speed	1600 rpm

Engine base	Scania
Fuel system	Extra High Pressure Injection (XPI)
Air intake	Turbocharged with after cooler
Cooling	Closed cooling with heat exchanger and charge air cooler
Max mounting angle	12° Front down 12° Front up
Alternator	24 Volt 100 Amp
Rating	M6.S / M5.L
Emission compliance	US tier 3 IMO Tier II EU Stage IIIA RCD2
Dry weight	1285 kg [2833 lbs]

# N13.800 CR3

588 kW [800 hp] at 2300 rpm

## TECHNICAL DESCRIPTION

### ENGINE BLOCK

- Extra high pressure fuel injection system, XPI
- Turbocharger
- Protection covers

### FUEL SYSTEM

- Scania Engine Management System, EMS
- Fuel pre-filter with water separator
- Fuel filter

### LUBRICATION SYSTEM

- Oil filter, full flow
- Centrifugal oil cleaner
- Oil cooler, integrated in block
- Oil filter
- Oil draining with plug
- Shallow oil sump
- Oil dipstick

### COOLING SYSTEM

- Sea water pump

### ELECTRICAL SYSTEM & INSTRUMENTATION

- Starter, 2-pole 7.0 kW
- Alternator, 2-pole 24V / 100A

### OTHER FEATURES

- Flywheel SAE 14"
- Silumin flywheel housing, SAE 1 flange
- Front-mounted engine brackets
- Closed crankcase ventilation
- Air cleaner
- Flexible engine mounting
- Damper pulley

### OPTIONAL SYSTEMS & ACCESSORIES

- Hydraulic pump
- Side-mounted PTO (SAE A)
- Axial front-mounted PTO
- Exhaust connections
- Engine coolant heater
- Stiff rubber suspension
- Oil draining with pump
- Oil level sensor
- Bilge pump

## RATINGS

### M6.S

- Up to 500 annual operating hours
- Load factor up to 50%
- Full power for no more than 1 hour out of each 12 hours of operation. The remaining operation time must be at or below cruising speed

### M5.L patrol craft long


- Up to 2000 annual operating hours
- Load factor up to 77%
- Full power for no more than 1 hour out of each 6 hours of operation. The remaining operation time must be at or below cruising speed

## TRANSMISSIONS


- Contact your Nanni representative for more details and availability about transmissions types and models range.

## PERFORMANCE CURVES


### POWER AT CRANKSHAFT

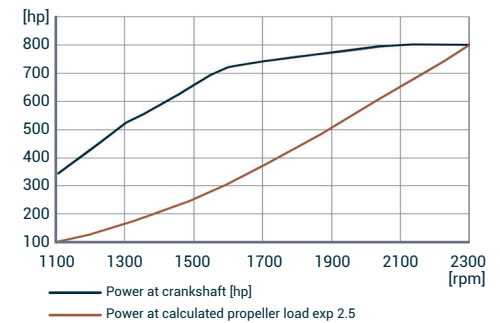



### TORQUE AT CRANKSHAFT

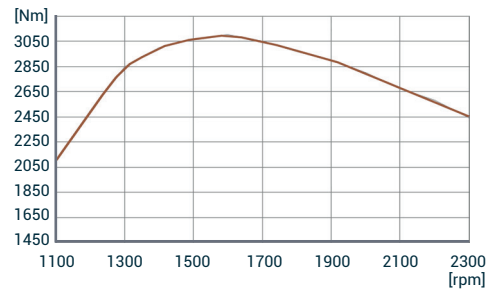

### FUEL CONSUMPTION

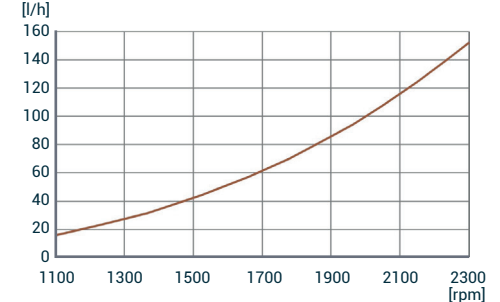

## DIMENSIONS

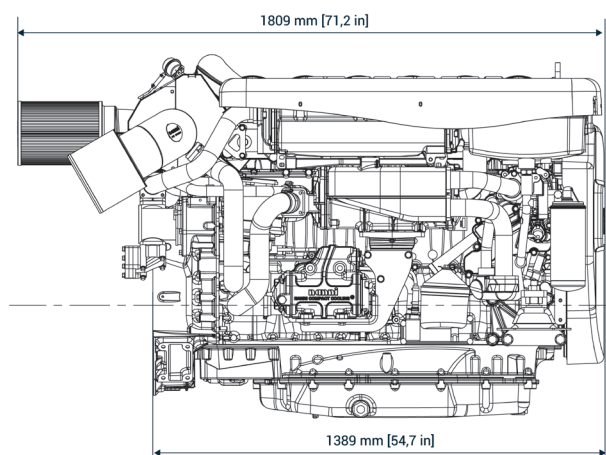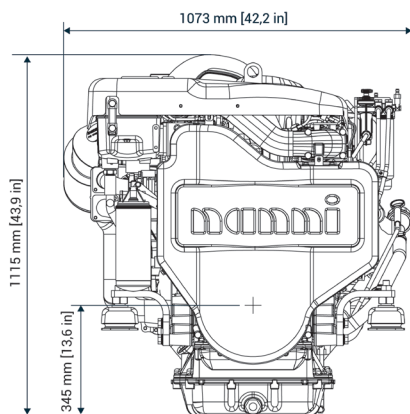

## NANNI INDUSTRIES S.A.S.

11, Avenue Abbé Mariotte  
33260 La Teste - France  
Tel +33 (0)5 56 22 30 60  
[www.nannienergy.com](http://www.nannienergy.com)

## NANNI SRL

Via degli Olmetti, 44/A  
00060 Formello - Roma - Italia  
Tel +39 06 30 88 42 51  
[www.nannienergy.com](http://www.nannienergy.com)

Technical data according to ISO 8665. This document is not contractual. Nanni reserves the right to modify any of the characteristics stated in this document without notice, in a constant effort to improve the quality of its products. Images and illustrations may show non standard equipments. All combination of equipment & accessory are not available.

DGBXXC01048B