

N16.1200 CR3

SPECIFICATIONS



Power at crankshaft	882 kW [1200 hp]
Displacement	16.4 l [1000.8 in³]
Configuration	8 cylinders in V
Operation type	4 stroke Diesel
Bore & Stroke	130 x 154 mm [5.1 x 6.1 in]
Compression ratio	15.7 : 1
Rated speed	2300 rpm
Idling speed	600 rpm
Peak torque	4139 Nm
Peak torque speed	1700 rpm

Engine base	Scania
Fuel system	Extra High Pressure Injection (XPI)
Air intake	Twin turbocharged with air-to-seawater aftercooler
Cooling	Closed cooling with heat exchanger and aftercooler
Max mounting angle	12° Front up 12° Front down
Alternator	24 Volt 100 Amp
Rating	M6.S
Emission compliance	IMO Tier II NRMM 97/68/EC
Dry weight	1660 kg [3659.7 lbs]

N16.1200 CR3

882 kW [1200 hp] at 2300 rpm

TECHNICAL DESCRIPTION

ENGINE BLOCK

- Extra high pressure fuel injection system, XPI
- Twin Turbochargers
- Protection covers

FUEL SYSTEM

- Scania Engine Management System, EMS
- Fuel pre-filter with water separator
- Fuel filter

LUBRICATION SYSTEM

- Oil filter, full flow
- Centrifugal oil cleaner
- Oil cooler, integrated in block
- Oil draining with plug
- Shallow oil sump
- Oil dipstick

COOLING SYSTEM

- Sea water pump

ELECTRICAL SYSTEM & INSTRUMENTATION

- Starter, 2-pole 7.0 kW
- Alternator, 2-pole 24V / 100A

OTHER FEATURES

- Flywheel SAE 14"
- Silumin flywheel housing, SAE 1 flange
- Front-and-rear mounted engine brackets
- Closed crankcase ventilation
- Air cleaners
- Flexible engine mounts
- Damper

OPTIONAL SYSTEMS & ACCESSORIES

- Predisposition for SAE B hydraulic pump
- Axial front PTO
- Exhaust connections
- Cabin heater
- Rigid mounts
- Oil draining pump
- Oil level sensor
- Bilge pump

RATINGS

M6.S


- Up to 500 hours per year
- Load factor up to 50%
- Full power for no more than 1 hour out of each 12 hours of operation.

TRANSMISSIONS


- Contact your Nanni representative for more details and availability about transmissions types and models range.

PERFORMANCE CURVES


POWER AT CRANKSHAFT

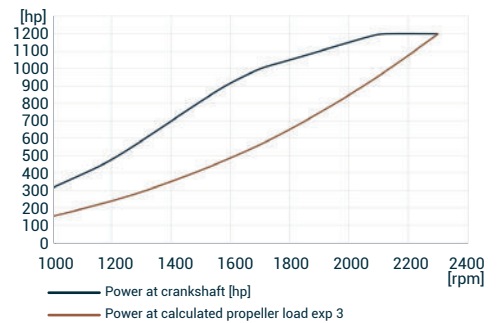



TORQUE AT CRANKSHAFT

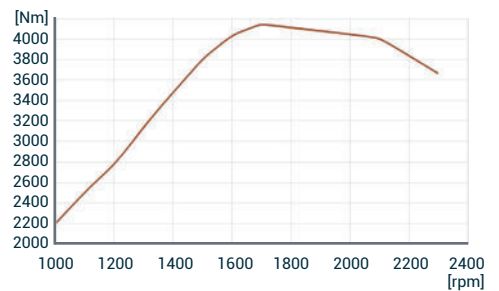

FUEL CONSUMPTION

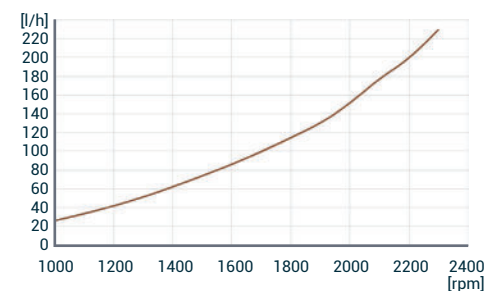

DIMENSIONS

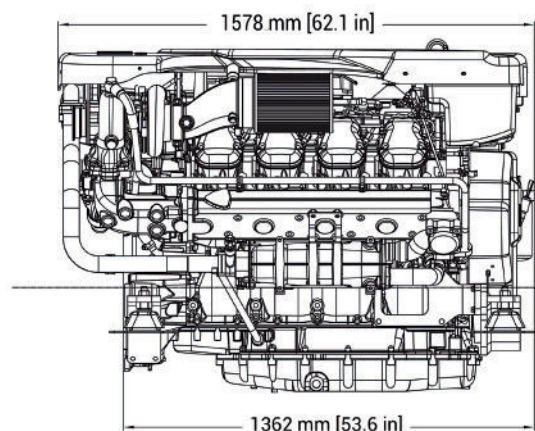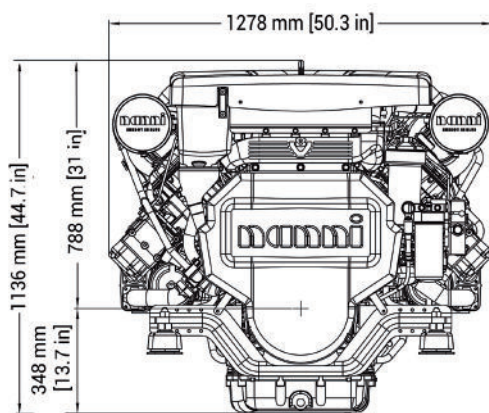

NANNI INDUSTRIES S.A.S.

11, Avenue Mariotte - Zone Industrielle
33260 La Teste - France
Tel: +33 (0)5 56 22 30 60
Fax: +33 (0)5 56 22 30 79

Technical data according to ISO 8665. This document is not contractual. Nanni reserves the right to modify any of the characteristics stated in this document without notice, in a constant effort to improve the quality of its products. Images and illustrations may show non standard equipments. All combination of equipment & accessory are not available.

DGBXXC01050